

NonOilen® TF 3066-8

TECHNICAL DATASHEET

 Last actualisation: **4/2024**

Basic description

NonOilen® is thermoplastic material based on biodegradable polymer blends made of 100% renewable raw materials. NonOilen®, produced by PANARA a.s., undergoes biodegradation under various natural conditions (e.g. at home compost, industrial compost, soil, seawater) according to material composition.

Application segment

NonOilen® TF 3066-8 is optimised for sheet extrusion for thermoforming and vacuum forming technology.

Physical form

Cylindrical pellets

Composition


| | |
|-------------------------|--|
| Major components | PLA, PHA polymers |
| Minor components | Biodegradable plasticiser(s) and other additives |

Material properties (typical values, do not perform a specification of given grade)

| Parameter | Test method | Unit | Value | |
|---|-------------|-------------------|-------------------|-------------------|
| Rheological properties | | | | |
| Complex viscosity (measured using oscillating rheometer) | 160°C | Internal method | 1697 | |
| | 180°C | Internal method | 735 | |
| Mechanical properties | | | | |
| Density at 23°C | ISO 1183 | g/cm ³ | 1,2 | |
| Tensile strength | ISO 527 | MPa | 37 | |
| Tensile strength | | MD | MPa | 24 |
| Elongation at break | | TD | % | 5 |
| Elongation at break | | MD | % | 14 |
| Tensile modulus | | TD | GPa | 2 |
| Tensile modulus | | MD | GPa | 1,4 |
| Charpy impact strength un-notched | | ISO 179 | kJ/m ² | 50 |
| Charpy impact strength un-notched | | | 23°C | kJ/m ² |
| Flexural strength | ISO178 | MPa | 56 | |
| Flexural deformation | | % | 4 | |
| Flexural modulus | | GPa | 2 | |

(MD) = Machine direction; (TD) = Transversal direction

MFI is not relevant parameter for NonOilen® materials because measurement system for MFI does not allow to determine true flow properties of NonOilen® blend. The best testing method is represented by oscillating rheometry which give values of complex viscosity. For better understanding relation between complex viscosity and commonly using MFI parameter, correlation curve between both parameters is in Figure on right side. MFI values represent there MFI of LDPE at 190°C or PP at 230°C under 2.16 kg loading. Viscosity was measured at low shear rates (15/s), so at real high shear rate during injection, NonOilen® will flow much easily.

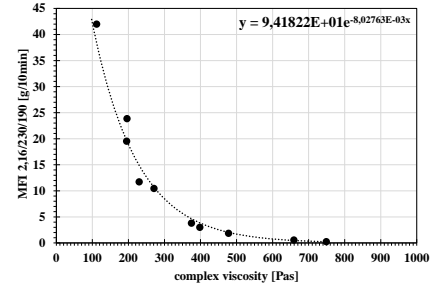

| Parameter | Test method | Unit | Value |
|---------------------------------------|----------------------------|----------|--|
| Thermal properties | | | |
| Glass transition temperature | DSC | °C | 58 |
| Melting point | DSC | °C | 184 |
| Crystallisation temperature | DSC | °C | 110 |
| Heat deflection temperature | ISO 75, B | °C | 107 |
| Vicat softening point VST | ISO 306, A/50 | °C | N/A |
| Barrier properties | | | |
| Permeation of O ₂ (OTR) | 23°C, 0 % RH, 1bar, 150 µm | internal | cm ³ /(m ² .day) |
| Permeation of H ₂ O vapour | 23°C, 85 % RH, 150 µm | internal | mg(m ² .day) |
| Biodegradation | | | |
| Industrial compost | ISO 14855 | | OK compost Industrial TÜV Austria* |
| Home compost | | | N/A |
| Biodegradability at soil conditions | ISO 17556 | | N/A |

* Under certification process

Storage and handling

NonOilen® is delivered in 20kg barrier bags. The original package should be stored at humidity up to 60% and temperature in range 10 – 30°C. Pellets are pre-dried. Before processing, drying for 1 hour at 70°C is recommended. The moisture content should be below 1000 ppm (0,1%).

Special additives

Colour masterbatches and other additive masterbatches can be used for processing as well as other properties modification. The Avient masterbatches for NonOilen® are recommended.

Processing conditions

Melt temperature should not exceed 200°C, optimally it should range from 160 to 180°C on the die. NonOilen® TF 3066-8 is suitable for cast film (sheet) extrusion in thickens up to 1 mm – semi-product for thermoforming. Thermoforming process parameters have to be adjusted according to specifics of production line and product shape.

| Zone 1 | Zone 2 | Zone 3 | Zone 4 | Die | Chill rolls |
|------------|------------|------------|------------|-------|-------------|
| 180-190 °C | 180-190 °C | 180-190 °C | 180-190 °C | 190°C | 25-50°C |

